

INTRODUCING THE SMALLEST ZIGBEE HOME AUTOMATION DEVICES IN THE WORLD



**NYCE
CONTROL**

How to Install a NYCE Control Keyfob

STEP 1: INSTALL BATTERY



1. Slide open the Keyfob Battery cover.
2. Remove the plastic tab from the battery.



3. Re-install the CR2032 battery with the positive (+) side pointing out.
4. Slide the Keyfob Battery cover closed.

STEP 2: INSTALL DRIVER + IDENTIFY DEVICE

Install the device's driver


- NCZ-3201 Driver is named: [DriverWorks_HA_Profile_KeyFob.c4i](#)
- Download driver from: www.nycecontrol.com/support or from Control4's online database
- Copy driver to My Documents\Control4\Drivers
- Open Composer and add device to project (Manufacturer = "Nyce Control")
- Identify the device by following the button presses below while the identify window is open:

Press both and , a flash should appear.




Immediately press 4 times, flashes should appear.

After a few seconds, flashes should appear.



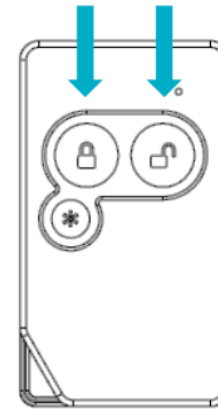
















- The device's 64-bit address should appear in the identify window's text box.






PRODUCT FUNCTION + LED INDICATORS



Press both  and , a  flash should appear:

Button Press	LED w/Press	Action	LED Response	Description
then  2 times		Network Status	 	Not Joined Joined
then  4 times		Network Join	 	Join Successful Join Unsuccessful
then  6 times	 	Network Leave		Leave Successful
then  10 times		Restore Defaults	 	Leave (if joined) and Defaults Restored
		No Action	  	Unsupported Command Network Error, retry Device Busy

Normal Operation:

Any		Any		Command Acknowledged
Any		Any	 Long Pulses	Low Battery