



# TEST REPORT: HDR-60-48

## 60W Ultra Slim Step Shape DIN Rail

### ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

### ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

### ■ RELIABILITY TEST



ENVIRONMENT TEST

DESIGN VERIFY TEST  
OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 43.20V ~ 55.20V	I/P : 230VAC O/P: MIN LOAD TA : 25°C	CH1: 42.225V ~ 57.415V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 1.0% ~ -1.0%	I/P : 85VAC / 277VAC O/P: FULL / MINLOAD TA= 25°C	V1: 0.10% ~ 0.08%
3	LINE REGULATION (MAX.)	V1 : 1.0% ~ -1.0%	I/P : 85VAC / 277VAC O/P: FULL LOAD TA : 25°C	V1: 0.00% ~ -0.02%
4	LOAD REGULATION (MAX.)	V1 : 1.0% ~ -1.0%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: 0.02% ~ 0.00%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	TEST< 2.9 %
	RIPPLE & NOISE(Max)	V1 : 240 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25°C	V1 : 44.4 mVp-p

high frequency:

low frequency:

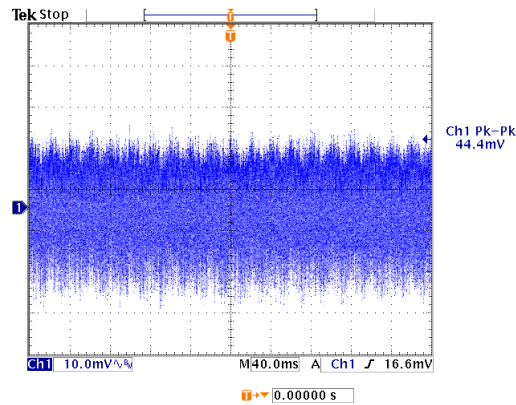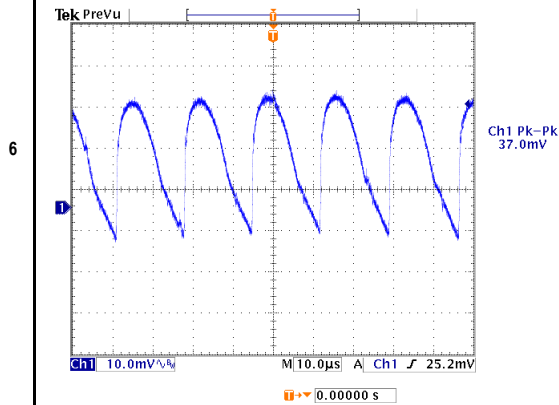



SET UP TIME (MAX.)	230VAC : 500ms 115VAC : 500ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 208ms 115VAC : 128ms
--------------------	----------------------------------	---	----------------------------------

INPUT=230VAC/50HZ @ FULL LOAD


CH1 : Output Voltage CH2 : AC Input Voltage

INPUT=115VAC/60HZ @ FULL LOAD


CH1 : Output Voltage CH2 : AC Input Voltage

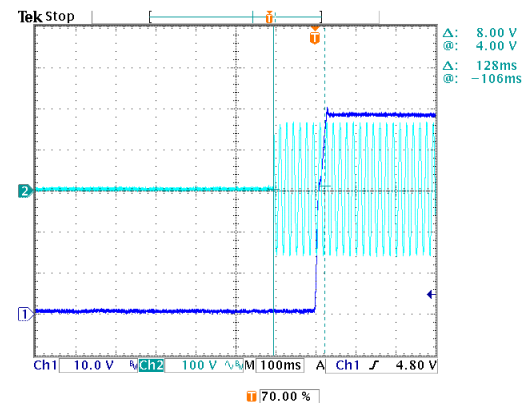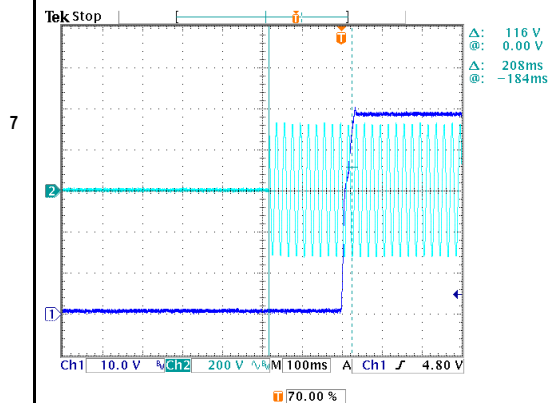


RISE TIME (MAX.)	230VAC	: 50ms	I/P :	230VAC	230VAC	: 23.4ms
	115VAC	: 50ms	I/P :	115VAC	115VAC	: 22.2ms
			O/P:	FULL LOAD		
			TA :	25°C		

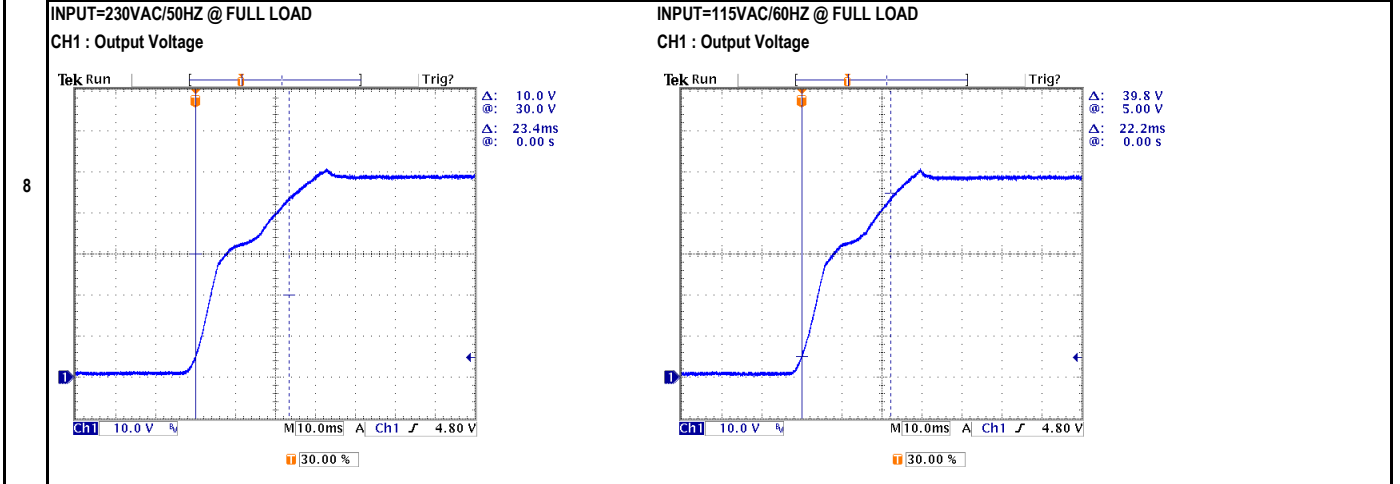

HOLD UP TIME (TYP.)	230VAC	: 30ms	I/P :	230VAC	230VAC	: 91.2ms
	115VAC	: 12ms	I/P :	115VAC	115VAC	: 20.8ms
			O/P:	FULL LOAD		
			TA :	25°C		

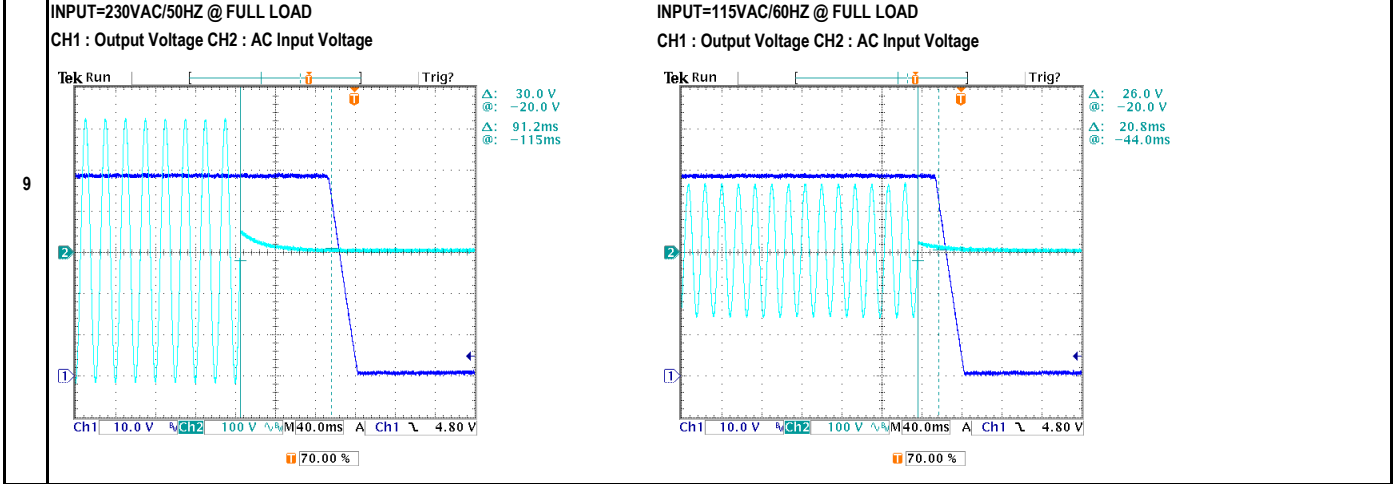


DYNAMIC LOAD	V1 :	4800	mVp-p	I/P :	230VAC	(1).	(2).	unit:mVp-p
				O/P:		936mv	512mv	
			(1)Full/Min load 50%duty/120HZ					
			(2)Full/Min load 50%duty/1KHZ					
			TA :	25°C				

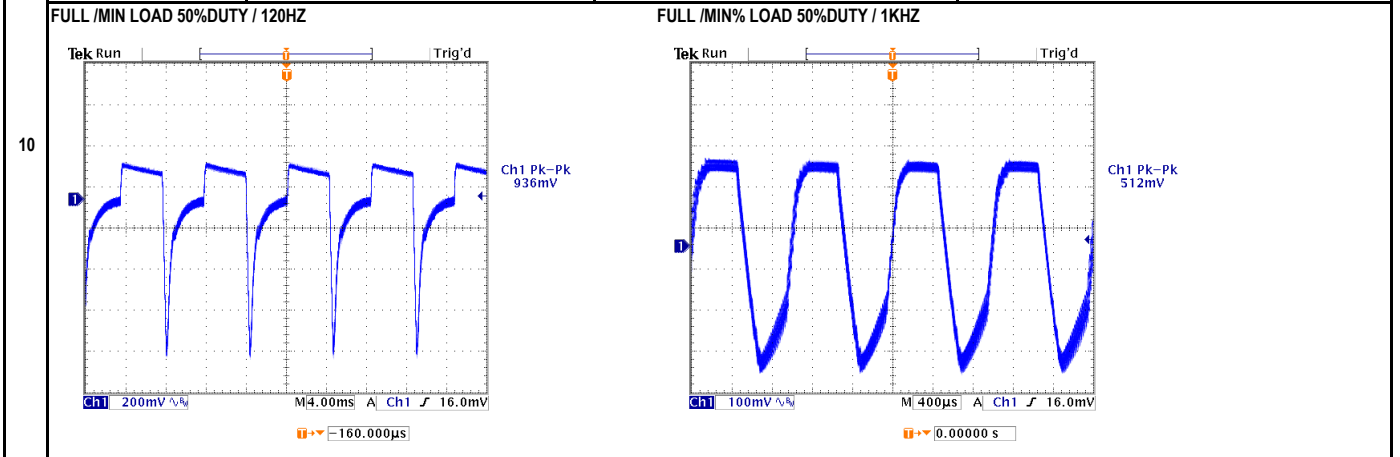


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC ~ 277VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	68.0VAC ~ 277VAC
			I/P : LOW-LINE = 82VAC HIGH-LINE = 300VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN ( POWER ON/OFF NO DAMAGE )	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 85VAC ~ 277VAC O/P : FULL-MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	0.80A / 230VAC 1.20A / 115VAC	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 0.50A / 230VAC I= 0.93A / 115VAC
4	NO LOAD POWER CONSUMPTION	< 0.30W	I/P : 230VAC O/P : MIN LOAD TA : 25°C	< 0.2198 W
	EFFICIENCY (TYP.)	91.0%	I/P : 230VAC O/P : FULL LOAD TA : 25°C	91.355 %

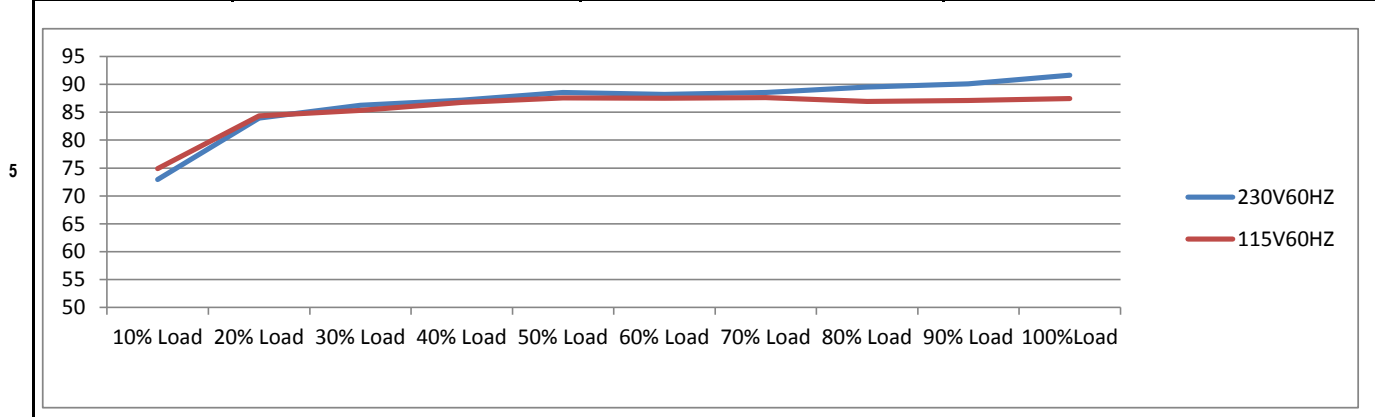

6	INRUSH CURRENT (TYP.)	60A / 230VAC 30A / 115VAC twidth= 555 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 54.2A / 230VAC I= 24.6A / 115VAC
		INPUT=230VAC/50HZ @ FULL LOAD	INPUT=115VAC/50HZ @ FULL LOAD	

CH2 : AC Input Voltage CH4 : Input current (1V=1A)      CH2 : AC Input Voltage CH4 : Input current (1V=1A)

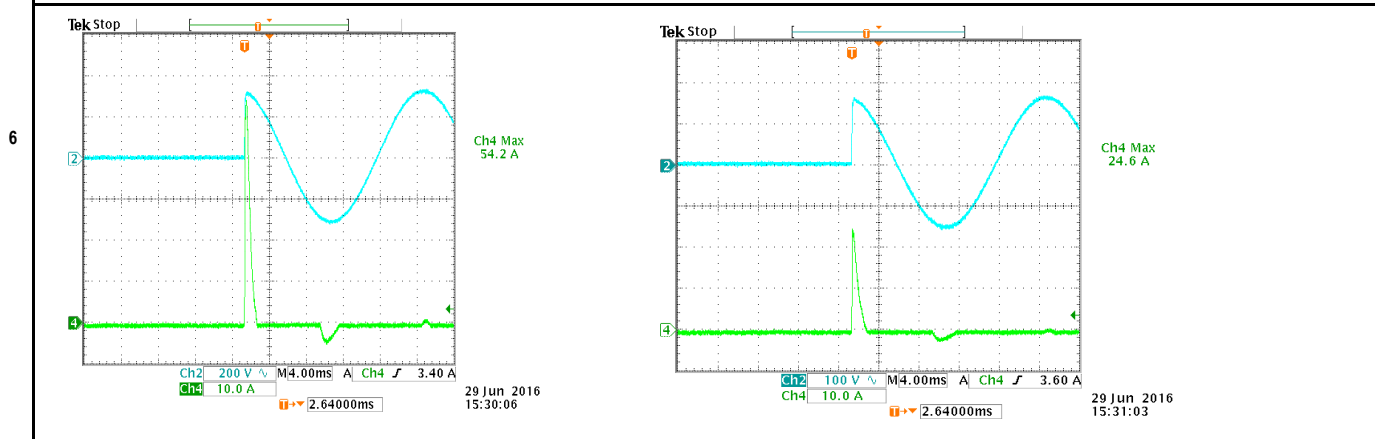

**PROTECTION FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105% ~ 160%	I/P: 277VAC I/P: 230VAC I/P: 85VAC O/P: TESTING  TA : 25°C	133.60% 277VAC 133.60% 230VAC 133.60% 85VAC  Hiccup mode when output voltage < 50%, recovers automatically after fault condition is removed;  Constant current limiting within 50%~100% rated output voltage, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	56.50V ~ 64.80V	I/P: 277VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD TA : 25°C	63.60V 277VAC 63.60V 230VAC 63.60V 85VAC  Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 277VAC I/P: 85VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE  hiccup mode, it will recover automatically after fault condition is removed

**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated : 600V 13.0A	I/P : 280VAC  VDS : O/P : (1) Full Load Turn on (2) Output Short (3) Full load continue Ta : 25°C	VIN: 280VAC VDS: (1). 584.00V (2). 492.00V (3). 564.00V
2	O/P MOSFET	Q100 Rated : 400V 10.0A	I/P : 280VAC  VDS : O/P : (1) Full Load Turn on (2) Output Short (3) Full load continue Ta : 25°C	Q100 VDS : (1). 205.00V (2). 145.00V (3). 204.00V
3	Input Capacitor	C5 Rated : 120uf 400V	I/P : 280VAC O/P : (1) Full Load Turn on /Off (2) Min load Turn on /Off (3) Full Load /Min load Change Ta : 25°C	(1). 398.00V (2). 398.00V (3). 374.00V
4	Control IC	U101 Rated : 38V (max) 0V (min)  U1 Rated : 35V (max) 0V (min)	I/P : 280VAC O/P : (1) Full Load (2) Output Short (3) O.L.P (4) O.V.P (5) Low Line No Load Vo(min) Ta : 25°C	U101 U1 (1). 24.50V 24.70V (2). 0.68V 11.50V (3). 3.24V 11.40V (4). 24.50V 30.90V (5). 24.50V 21.00V
5	Clamp Diode	D42 Rated : 1000V 2.0A	I/P : 280VAC O/P : (1) Dynamic Load Full/Min Load 90%Duty/1KHz (2) Full load continue Ta : 25°C	(1). 494.00V (2). 492.00V

**SAFETY & E.M.C. TEST**

**SAFETY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 4.00KVAC /min	I/P-O/P: 4.40KVAC /min Ta : 25°C	I/P-O/P: 1.32mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC > 100MΩ	I/P-O/P: 500VDC Ta : 25°C / 70%RH	I/P-O/P: 9999MΩ NO DAMAGE

**E.M.C. TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

**RELIABILITY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : HDR-60-24 1. ROOM AMBIENT BURN-IN : 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 21.2°C 2. HIGH AMBIENT BURN-IN : 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 49.8°C	NO. Position ROOM AMBIENT 21.2°C HIGH AMBIENT Ta: 49.8°C 1 LF1 48.5°C 72.5°C 2 BD1 52.9°C 76.3°C 3 C5 54.6°C 79.6°C 4 Q1 66.3°C 88.6°C 5 D42 71.5°C 94.9°C 6 T1 84.6°C 105.7°C 7 C105 65.4°C 87.3°C 8 Q100 76.4°C 98.7°C 9 LF101 63.9°C 86.3°C 10 U1 58.2°C 81.4°C	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P : 230VAC O/P : 123.10% LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR ( MIN )	I/P : 277VAC / 100VAC O/P : FULL LOAD Ta : -30.0°C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 45°C NO DAMAGE	I/P : 287VAC O/P : FULL LOAD Ta : 45°C HUMIDITY= 95.0% RH	TEST : OK
5	TEMPERATURE COEFFICIENT	±0.03% /(0°C~50°C)	I/P : 230VAC O/P : FULL LOAD	±0.0072% /(0°C~50°C)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		TEST : OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C ~ +50°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC Full Load AC ON/OFF test turn on 58sec ; turn off 2sec		TEST : OK



8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 2G (5) Test Time : 60 min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	:SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25.0°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 45.0°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 45.0°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 45.0°C LIFE TIME	(1). 120198 HRS (2). 47838 HRS (3). 73808.8 HRS (4). 153816 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 927.6K hrs min. MIL-HDBK-217F (25°C)	
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 45°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014