



Test Report: LRS-50-5

50W Single Output Switching Power Supply

DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 4.5 V- 5.5 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	5.795V~4.278V/230VAC 5.795V~4.278V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: 2 %~ -2 %	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: 0 %~ 0.197%
3	LINE REGULATION (Max)	V1: 0.5 %~ -0.5 %	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0 %~ 0 %
4	LOAD REGULATION(Max)	V1: 1 %~ -1 %	I/P: 230VAC O/P:FULL -MIN LOAD Ta:25°C	V1: 0 %~ 0.197%
5	OVER/UNDERSHOOT TEST	< ±10%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	< ±10%
6	RIPPLE & NOISE(Max)	V1: 80 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1:17.2mVp-p
		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>high frequency :</p> </div> <div style="text-align: center;"> <p>low frequency :</p> </div> </div>		
7	SET UP TIME(Max)	230VAC/1000ms 115VAC/2000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 308 ms 115VAC/ 492 ms
		<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> <p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>		




	<p>Δ: 324 V @: 0.00 V Δ: 308ms @: -300ms</p>		<p>Δ: 296 V @: 144 V Δ: 492ms @: -484ms</p>
<p>8</p>	<p>RISE TIME (Max) 230VAC/30ms 115VAC/30ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 9.6 ms 115VAC/ 8.8 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage</p>	<p>Δ: 760mV @: 3.38 V Δ: 9.60ms @: 0.00 s</p>	<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage</p>	<p>Δ: 4.42 V @: 500mV Δ: 8.80ms @: 0.00 s</p>
<p>9</p>	<p>HOLD UP TIME (Typ.) 230VAC/30ms 115VAC/12ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 35.2 ms 115VAC/ 15.2 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>	<p>Δ: 52.0 V @: -254 V Δ: 35.2ms @: -37.6ms</p>	<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>	<p>Δ: 70.0 V @: -56.0 V Δ: 15.2ms @: -17.6ms</p>


10	DYNAMIC LOAD	V1: 1000 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	390mVp-p 390mVp-p
	<p>FULL /50% LOAD 50%DUTY / 120HZ</p> <p>Ch1 Pk-Pk 390mV</p> <p>Ch1 100mV 4.00ms A Ch1 192mV</p>		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p> <p>Ch1 Pk-Pk 390mV</p> <p>Ch1 100mV 400µs A Ch1 196mV</p>	

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	76 V~264V
			I/P: (1)LOW-LINE-3V=82 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:100 VAC ~264 VAC O/P:FULL -MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 0.56A 115V/0.95 A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =0.478A/ 230VAC I =0.849A/ 115VAC
4	LEAKAGE CURRENT	<0.75 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.199 mA N-FG : 0.199 mA
5	NO LOAD CONSUMPTION	< 0.2W	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	< 0.0609W < 0.1235 W
6	EFFICIENCY(Typ.)	83%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	83.15%
	EFFICIENCY vs LOAD			

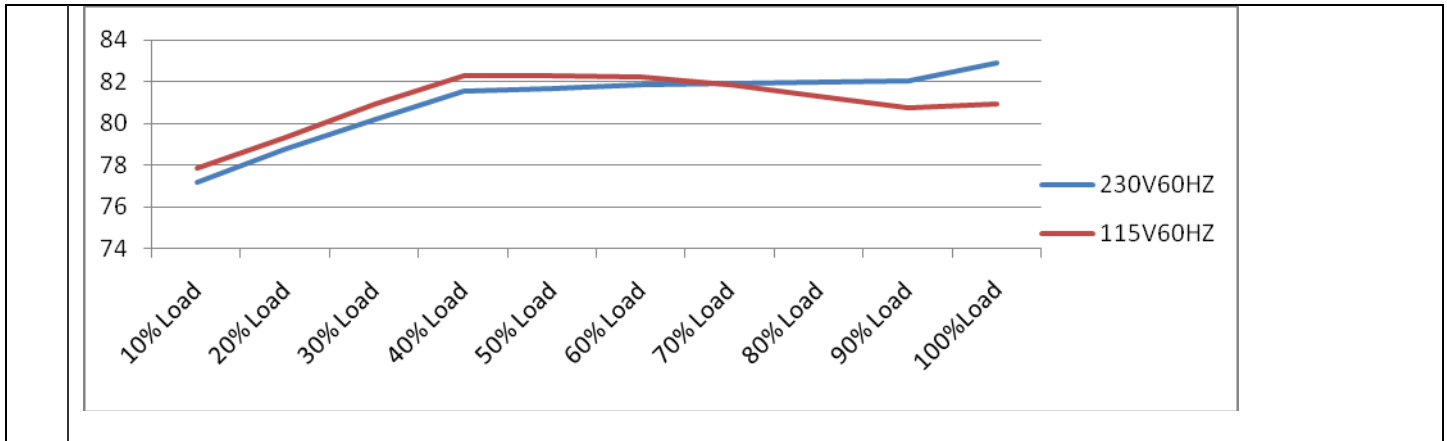

7	INRUSH CURRENT(Typ.)	230V/40A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I = 20.4 A/ 230VAC
---	----------------------	------------------------	---	--------------------

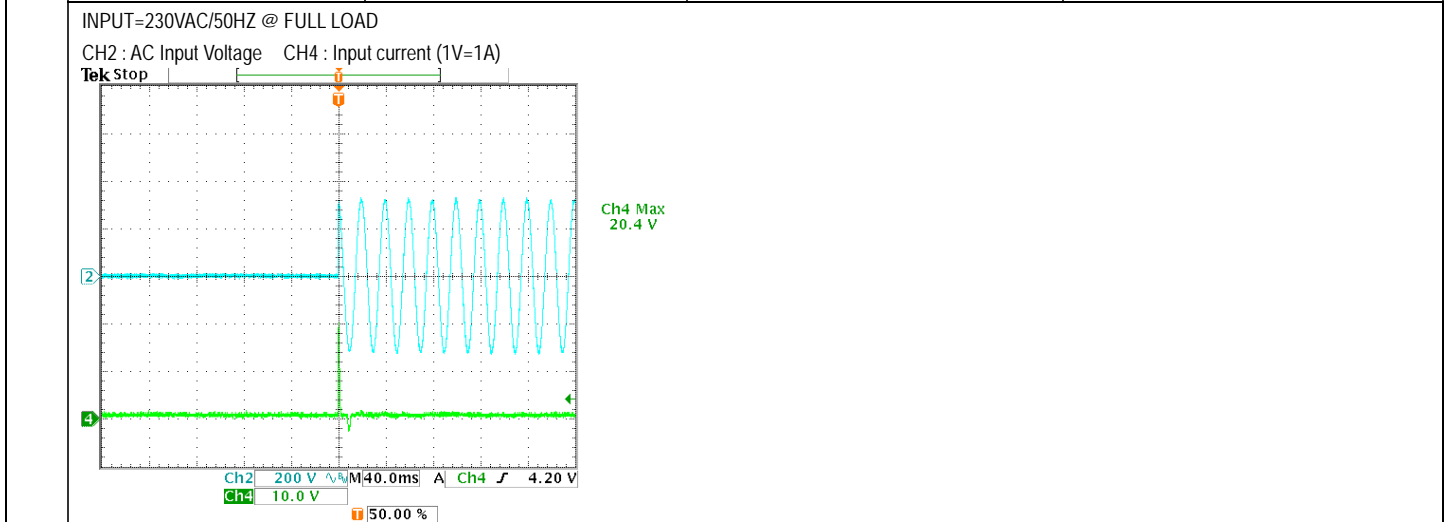

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110 %- 150 %	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	134.5%/ 264VAC 134.2%/ 230VAC 125.1%/100VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	5.75 V-6.75 V	I/P: 264VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta:25°C	6.6V/ 264VAC 6.6V/ 230VAC 6.6V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P:85VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated 10A/ 600 V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	VDS: (1)528V (2)488V (3)524V (4)520V (5)532V (6)520V (7)592V
2	Diode Peak Voltage	Q100 Rated 75A/ 60V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C	Q100: VDS: (1)39.6V (2)35.4V (3)40.4V (4)40.6V (5)40.2V (6)40.2V (7)40.2V (8)40.2
3	Input Capacitor Voltage	C5 Rated: 100u/400V 105°C 18*25 CLA IIR	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1)378V (2)376V (3)378V
4	Control IC Voltage Test	PWM IC U1 Rated 10.8 V-30V	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR Min..LOW LINE Ta:25°C	1. 24.2V 2. 15.4V 3. 24.2V 4. 24.5V 5. 11.7V-
5	C6 Peak Voltage	D5 Rated : 3A/600V	I/P : High-Line +3V = 267 V AC ON/OFF O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	(1)480 V (2)472 V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG: 2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.4KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5 KVAC/min Ta:25°C	I/P-O/P: 2.1213 mA I/P-FG: 2.096 mA O/P-FG: 2.089 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P:9999MΩ I/P-FG: 9999MΩ O/P-FG: 9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	8 mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:100%LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																
1	TEMPERATURE RISE TEST	MODEL : LRS-50-5 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=27.0°C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=43.1°C																																																																		
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=27.0°C</th> <th>HIGH AMBIENT Ta=43.1 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>60.7°C</td><td>78.7°C</td></tr> <tr><td>2</td><td>BD1</td><td>68.1°C</td><td>85.1°C</td></tr> <tr><td>3</td><td>C5</td><td>65.3°C</td><td>82.8°C</td></tr> <tr><td>4</td><td>D5</td><td>93.2°C</td><td>105.1°C</td></tr> <tr><td>5</td><td>Q1</td><td>85.4°C</td><td>99.5°C</td></tr> <tr><td>6</td><td>C35</td><td>80.2°C</td><td>96.3°C</td></tr> <tr><td>7</td><td>T1coil</td><td>79.7°C</td><td>96.9°C</td></tr> <tr><td>8</td><td>T1core</td><td>87.4°C</td><td>104.1°C</td></tr> <tr><td>9</td><td>C105</td><td>73.0°C</td><td>87°C</td></tr> <tr><td>10</td><td>C106</td><td>68.4°C</td><td>82°C</td></tr> <tr><td>11</td><td>L100</td><td>80.4°C</td><td>97.6°C</td></tr> <tr><td>12</td><td>Q100</td><td>73.7°C</td><td>88.3°C</td></tr> <tr><td>13</td><td>U1</td><td>80.2°C</td><td>95.9°C</td></tr> <tr><td>14</td><td>D30</td><td>93.2°C</td><td>106.1°C</td></tr> <tr><td>15</td><td>D40</td><td>62.4°C</td><td>79.4°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=27.0°C	HIGH AMBIENT Ta=43.1 °C	1	LF1	60.7°C	78.7°C	2	BD1	68.1°C	85.1°C	3	C5	65.3°C	82.8°C	4	D5	93.2°C	105.1°C	5	Q1	85.4°C	99.5°C	6	C35	80.2°C	96.3°C	7	T1coil	79.7°C	96.9°C	8	T1core	87.4°C	104.1°C	9	C105	73.0°C	87°C	10	C106	68.4°C	82°C	11	L100	80.4°C	97.6°C	12	Q100	73.7°C	88.3°C	13	U1	80.2°C	95.9°C	14	D30	93.2°C	106.1°C	15	D40	62.4°C	79.4°C
NO	Position	ROOM AMBIENT Ta=27.0°C	HIGH AMBIENT Ta=43.1 °C																																																																	
1	LF1	60.7°C	78.7°C																																																																	
2	BD1	68.1°C	85.1°C																																																																	
3	C5	65.3°C	82.8°C																																																																	
4	D5	93.2°C	105.1°C																																																																	
5	Q1	85.4°C	99.5°C																																																																	
6	C35	80.2°C	96.3°C																																																																	
7	T1coil	79.7°C	96.9°C																																																																	
8	T1core	87.4°C	104.1°C																																																																	
9	C105	73.0°C	87°C																																																																	
10	C106	68.4°C	82°C																																																																	
11	L100	80.4°C	97.6°C																																																																	
12	Q100	73.7°C	88.3°C																																																																	
13	U1	80.2°C	95.9°C																																																																	
14	D30	93.2°C	106.1°C																																																																	
15	D40	62.4°C	79.4°C																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 130% LOAD Ta : 25°C	TEST : OK																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	1. I/P : 264VAC/ O/P : 100 % LOAD 2. I/P : 100VAC/ O/P : 75 % LOAD/75% Ta= -30°C	TEST : OK																																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK																																																																
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0-50°C)	I/P : 230 VAC O/P : FULL LOAD	±0.02%/°C (0-50°C)																																																																
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40°C~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																																
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30°C~ 70°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK																																																																



8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10-500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 5G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME	(1) 90182HRS (2) 31254HRS (3) 82411HRS (4) 153720HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE : 645KHRS	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C	

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ

2007/3/20 A50-S014