EASYGATE BV



The EasyGate BV comes in eye catching cladding technology with choice of different colours that perfectly blend in with any business environment like lobby areas, receptions, offices and much more.

EasyGate BV can be integrated with the lifts in your building. This allows you to call the lift and open the turnstile with one action. Available in wider version complying disabled access requirements.

BENEFITS

- LCD display with intuitive multi-language navigation icons
- LIFT CONTROL SYSTEM IMPROVING PEOPLE FLOW
- INTEGRATED VISITOR CARD COLLECTOR

- Barrier panel LED edge lighting
- Eye catching cladding panel technology
- Customized length of cabinet



Materials and finishes: Cabinet and Top Lid: Barrier Type:

Dimensions:

Cabinet height: Cabinet width: Barrier height:

cominfo

Side infill panel:







corian solid surface material (custom-designed colours) 10 mm (0.39") tempered glass barrier panels 6 mm (0.24") tempered glass panels

990 mm (39") 200 mm (7.87") 800 mm (31.5")

COMINFO, Inc., Nabrezi 695, 760 01 Zlin, Czech Republic tel.: +420 603 151 333; e-mail: cominfo@cominfo.cz








Standard equipment:

- Sophisticated control logic for safe and secure passage •
- Customized length of cabinet
- Audible local & remote alarm for unauthorized passage •

Options & accessories:

- Lift control system •
- Visitor Card collector
- Wing Light - barrier panel LED edge lighting
- Remote control consoles pushbutton or touchscreen •
- Ramp LT facilitates surface mounting without fastening to floor
- Versatile operating modes •

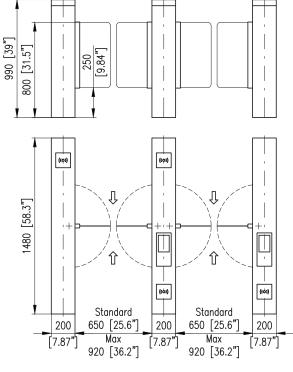

Operating environment:

- Configuration: Indoor •
- Operating temperature: + 10°C to + 50°C (50°F to 122°F)

Communication interface:


RS-485 / USB / Ethernet

Power supply:

13.8V DC / 24V AC

Detection and safety sensors:

- 8 pairs of advanced infrared optical sensors
- Single passage control
- Fraud detection: Tailgating / Cross-over / Crawl-under
- Emergency / Fire input





All dimensions in mm (inches).