



# EasyGate SPT-G Outdoor / SPT-R Outdoor

## Type

Swinging technology developed to withstand harsh outdoor conditions - IP 53

Optional bike access solution \*

1 wing / 2 wings

G model - round front

R model - square front

## Safety & Security Detection

- 36 pairs of IR sensors
- Safety & Security levels
- Tailgating / Cross over detection

## Dimensions

Cabinet height	975 mm	38.39"
Cabinet length	1 500 mm	59.06"
Cabinet width	210 mm	8.30"
Barrier height standard	1 200 mm	47.24"
Barrier height max.	1 800 mm	70.87"
Passage width standard**	650 mm	25.59"
Passage width max.**	1 050 mm	41.34"



EasyGate SPT-G Outdoor



EasyGate SPT-R Outdoor

\*Different dimensions of cabinet \*\* For 2 wings type



### Material and Colours

Cabinet	brushed stainless steel
Top Lid	black glass Top Lid
Barriers	glass barrier panels (10 mm / 0.39", tempered)
Side infill panel	6 mm (0.24") laminated glass panels

### Operating Environment

Outdoor - IP 53

### Drive Mechanism


MDD drive with external tooth brake

### Emergency Mode

Open automatically in the exit direction  
Pushthrough feature (Optional accessories)

### Optional Accessories

- RFID reader bracket (flush mounted)
- Access Light / Lane Light
- WAV player
- Pushthrough feature
- USB convertor / Ethernet convertor
- EasyTouch / TouchPanel / T-MON SW
- SuperCap (emergency power back-up)
- Alternative surface finishes / Optional top finishes
- Integration of Barcode and QR code scanner
- Side infill panel
- Ramp LT

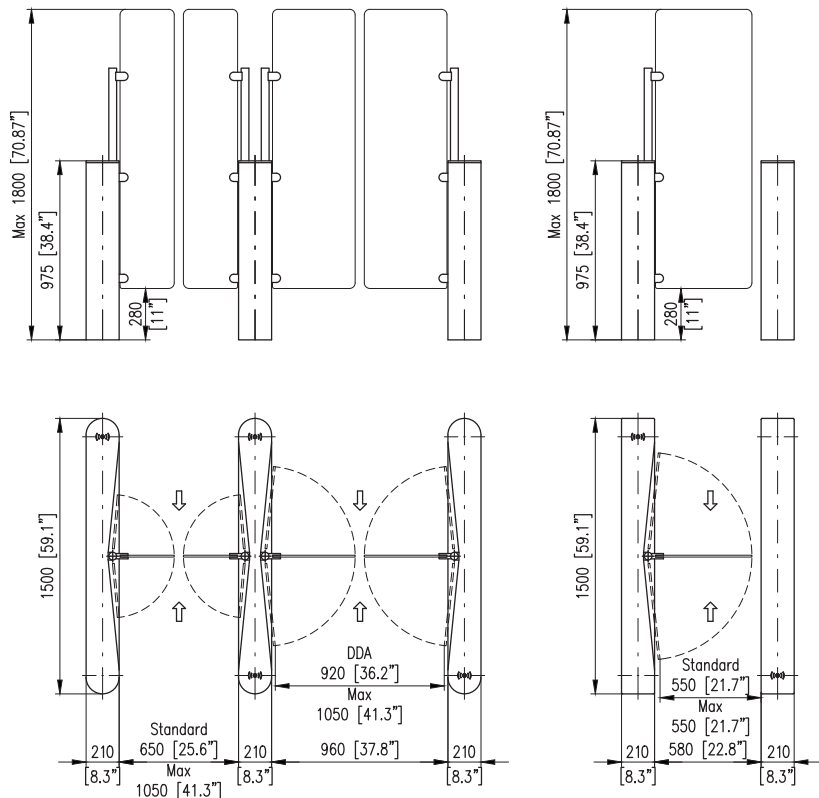

Specifications are subject to change without prior notice.