



EasyGate LiftCall

Type

Swinging technology

1 wing / 2 wings

Square front

Elevator assignment - terminal for automatic lift call, displays the lift number on the screen

Safety & Security Detection

- 30 pairs of IR sensors
- Safety & Security levels
- Tailgating / Cross over detection

Dimensions

Cabinet height	990 mm	38.98"
Cabinet length	1 400 mm	55.12"
Cabinet width	151 mm	5.95"
Barrier height standard	990 mm	38.98"
Barrier height max.	1 800 mm	70.87"
Passage width standard*	650 mm	25.59"
Passage width max.*	1 100 mm	43.31"
	<i>for height of glass wing up to 1 400 mm</i>	
	max 920 mm	36.22"
	<i>for height of glass wing 1 400 - 1 800 mm</i>	



EasyGate LiftCall / 990 mm



EasyGate LiftCall / 1 800 mm

* For 2 wings type



Material and Colours

Cabinet	RAL colored stainless steel
Top Lid	black glass & black corian
Barriers	glass barrier panels (10 mm / 0.39", tempered)
Side infill panel	RAL colored stainless steel

Operating Environment

Indoor

Drive Mechanism


Fail-Safe

Emergency Mode

Open automatically in the exit direction

Optional Accessories

- RFID reader bracket (flush mounted)
- Access Light
- WAV player
- Wing Light / Hinge capping
- USB convertor / Ethernet convertor
- EasyTouch / TouchPanel / T-MON SW
- SuperCap (emergency power back-up)
- Alternative surface finishes / Optional top finishes
- Integration of Card collector
- Ramp LT

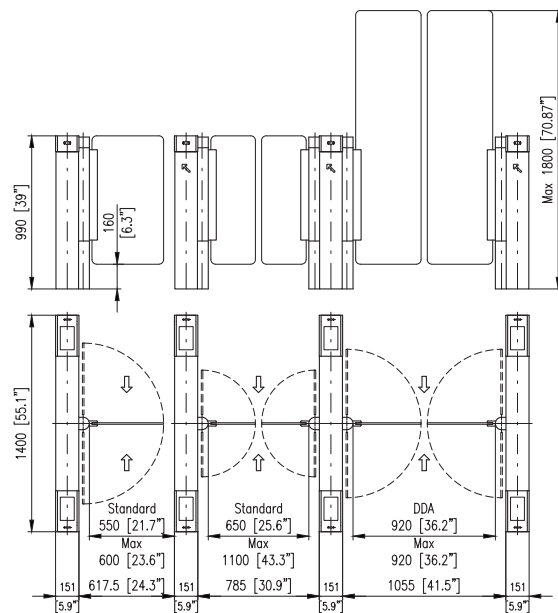

Specifications are subject to change without prior notice.