




3202/RI

ROMA SERIES AUDIO/VIDEO ENT. PANEL FOR IKALL UNIT, 2 BUTTONS

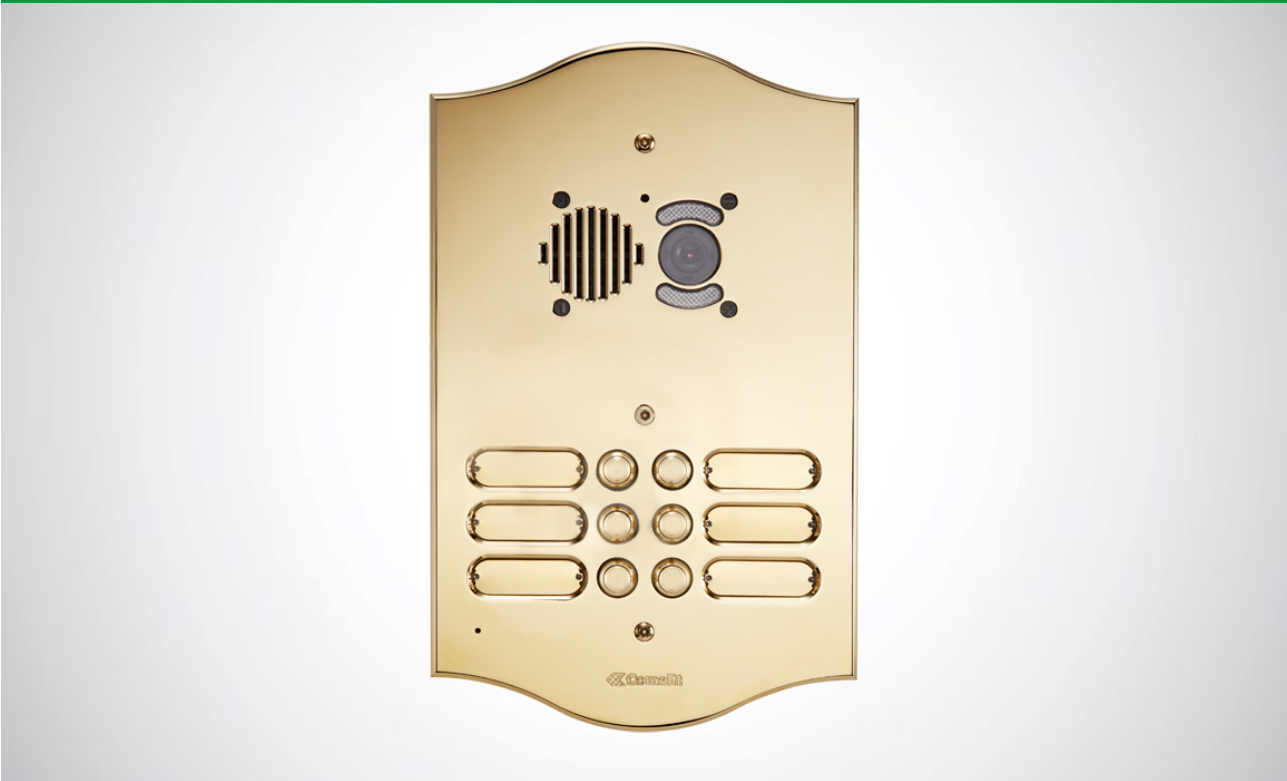

Video entry phone entrance panel with front plate in 3 mm thick watchmaking brass plate with PVD treatment. Complete with flush-mounted box and anti-intrusion screws. All entrance panels are fitted with bulb sockets (without bulb) for festoon bulbs with a diameter of 6.3 x 39. The keypad should be finished with an audio/video unit depending on the wiring system used. 2 buttons, 1 wire. Plate dimensions 135x247x3 mm. Box dimensions 115x181x55 mm. 1 bulb socket



3202/RI

ROMA SERIES AUDIO/VIDEO ENT. PANEL FOR IKALL UNIT, 2 BUTTONS

MAIN FEATURES

Audio system:	No
Audio/video system:	Yes
Flush-mounted:	Yes
Wall-mounted:	Yes
Total buttons:	2
Operating temperature (°C):	-25 ÷ 55
Vandal Resistant rating (IK code):	NO

HARDWARE SPECIFICATIONS

Customisable housing:	No
Visual signalling:	No
Acoustic signalling:	No
Sensitive Touch technology:	No

GENERAL DATA

Product height (mm):	247
Product width (mm):	135
Product depth (mm):	3
Product colour:	Brass

COMPATIBILITY

Simplebus Top audio/video system:	Yes
Simplebus 2 audio system:	Yes
Traditional system:	Yes
Simplified system:	Yes
Comelbus system:	Yes
Comtel system:	Yes



3202/RI

ROMA SERIES AUDIO/VIDEO ENT. PANEL FOR IKALL UNIT, 2 BUTTONS

ACCESSORIES



1621

Simplebus 2W audio unit with LED, Ikall series

Speaker unit for 2-wire systems complete with terminal block and audio control with echo-cancelling, sealed-unit loudspeaker, electret microphone and front-mounted loudspeaker volume control. Complete with microprocessor and 8-position dip switch for programming calls to users. On-board electronic lock-release function (3A) plus C, NC, NO contacts for 10A relay. Timed lock-release input and door open indication. Compatible with power supply unit art. 1210. Dimensions: 102x55x38 mm.



1621VC

SIMPLEBUS 2W IKALL COLOUR AV UNIT, REMOTE CAMERA

Speaker unit for 2-wire systems complete with terminal block and audio control with echo-cancelling, sealed-unit loudspeaker, electret microphone and front-mounted loudspeaker volume control. Allows use of external PAL colour cameras. Complete with microprocessor and 8-position dip switch for programming calls to users. On-board electronic lock-release function (3A) plus C, NC, NO contacts for 10A relay. Timed lock-release input and door open indication. Compatible with power supply unit art. 1210. Dimensions: 102x55x38 mm.



1622VC

IKALL COLOUR REMOTE CAMERA AUDIO MODULE SB2 COLOUR

Module which allows modulation and transmission of the colour video signal on the riser. On input it has the composite video signal of a colour camera. Complete with microprocessor and DIP SWITCH with 8 positions for programming calls to users. 33Vdc power supply via special power supply unit Art. 1595. On-board electronic lock-release function (3A), plus C, NC, NO contacts for 10A relay. For use in modules Art. 33400, 33401 and 33402. Dimensions: 102x55x38 mm. Compatible with all SBTOP functions and products. It allows call addressing for up to 120000 users. Timed lock-release inputs and door open indication.



1682

IKALL VIP AUDIO ONLY SPEAKER

Audio-video unit for VIP system including terminal block complete with front-adjustable mini lens colour camera, LED camera lighting. Complete with terminal block and digital audio management system with Eco-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. For fitting in modules: art.33400, 33401, 33402. Dimensions: 102x55x38 mm.



1682HVC

IKALL SERIES AUDIO MOD. FOR REM.COL.CAM. VIP. H264

VIP system audio unit with facility for connection of a remote camera with 12Vdc power supply. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. Dimensions: 102x55x38 mm. Compatible with H.264 video format.



3202/RI

ROMA SERIES AUDIO/VIDEO ENT. PANEL FOR IKALL UNIT, 2 BUTTONS

ACCESSORIES



4680C

IKALL SIMPLEBUS COLOUR CAMERA

Simplebus Color system audio/video unit with terminal block complete with front-adjustable wide-angle 1/3" CCD colour camera and LED camera illumination. Complete with terminal block and digital audio management system with Eco-cancelling, watertight loudspeaker and electrets microphone, loudspeaker volume can be adjusted from the front. Complete with microprocessor and DIP SWITCH with 8 positions for programming calls to users. Audiovisual indications for disabled individuals assistance request can be activated via programming. 33Vdc power supply via special power supply unit Art. 1595. On-board electronic lock-release function (3A), plus C, NC, NO contacts for 10A relay. For use in modules Art. 33410, 33411 and 33412. Dimensions: 102x55x38 mm. Compatible with all SBTOP functions and products. Allows call addressing for up to 120000 users. Timed lock-release input and door open indication.



4680CW

D&N WIDE COLOUR A/V UNIT. IKALL SERIES SIMPLEBUS

Audio/video unit with terminal block, Simplebus Color system, complete with colour camera with 2.3 mm lens and IR illumination. Digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume can be adjusted from the front. Complete with microprocessor and dip-switch with 8 positions for programming calls to users. Programmable audiovisual indications to comply with DDA. 33 VDC power supply via power supply unit part. 1595. On-board electronic lock-release function (3A), plus C-NC-NO 10A relay contacts. Compatible with all SBTOP functions and products. Allows call addressing up to 120000 users. Timed door opening and door open visualization. To add in the audio-video modules with 0, 1 and 2 buttons. Dimensions: 102x55x38 mm.



4681

COLOUR IKALL A/V UNIT. S2

Colour audio-video unit for 2-wire systems with terminal block complete with directable colour camera with front adjustment, LED camera lighting. Complete with terminal block and audio control with echo-cancelling, sealed-unit loudspeaker, electret microphone and front-mounted loudspeaker volume control. Complete with microprocessor and 8-position dip switch for programming calls to users. Programmable audiovisual functions for users with disabilities. On-board electronic lock-release function (3A) plus C, NC, NO contacts for 10A relay. Timed lock-release input and door open indication. Compatible with power supply unit art. 1210. Dimensions: 102x55x38 mm.



4682HC

COL.AUD/VID UNIT FOR VIP SYST., IKALL SERIES.H264

Audio-video unit for ViP system including terminal block complete with front-adjustable mini lens colour camera, LED camera lighting. Complete with terminal block and digital audio management system with Eco-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. For fitting in modules: art. 33410, 33411 and 33412. Dimensions: 102x55x38 mm.



3202/RI

ROMA SERIES AUDIO/VIDEO ENT. PANEL FOR IKALL UNIT, 2 BUTTONS

ACCESSORIES



4682HD

HD COLOUR AUDIO/VIDEO UNIT, IKALL SERIES. VIP

VIP system audio-video unit with terminal block, complete with colour camera. Resolution 1280x720 pixels. Recording angle 110° (H) - 80° (V). IR led camera lighting. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electrets microphone; loudspeaker volume can be adjusted from the front. Programmable audio visual functions for users with disabilities. Standard POE audio-video unit, but if necessary 33 VDC power supply can be used the power supply unit art. 1595. Compatible with H.264 video format. Dimensions: 102x55x38 mm.

1172B

LED BULB FOR EXTERNAL UNITS

LED bulb for nameplate lighting.



3063D

MODULE W/8 BUTT.IN 2 ROWS+VIP FOR SING.-PLATE PAN.

Button management module. Works in conjunction with audio/video modules or audio module. Allows management of 8 buttons. Dimensions: 45x55x30 mm.

