



Test Report: LRS-150-24

150W Single Output Switching Power Supply

DESIGN VERIFY TEST

Output Function Test
Input Function Test
Protection Function Test
Component Stress Test

SAFETY & E.M.C. TEST

Safety Test
E.M.C. Test

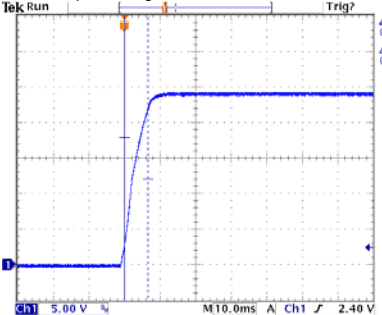
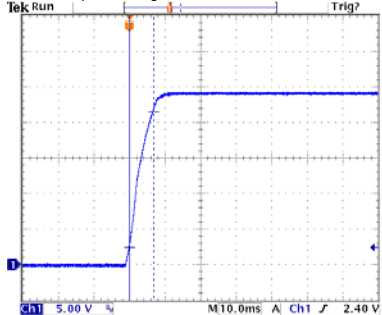
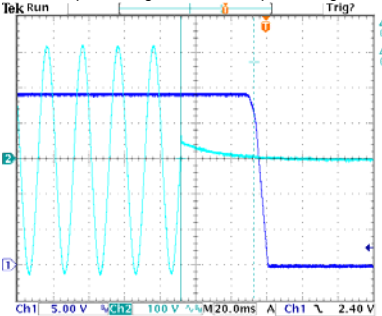
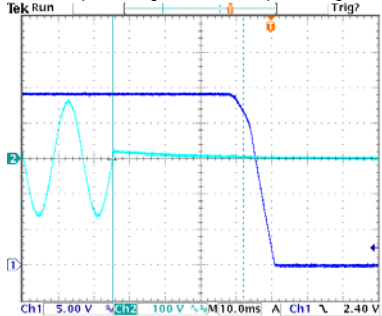
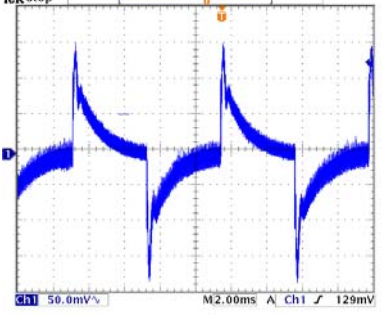
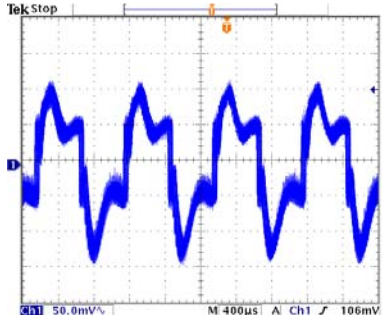
RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST

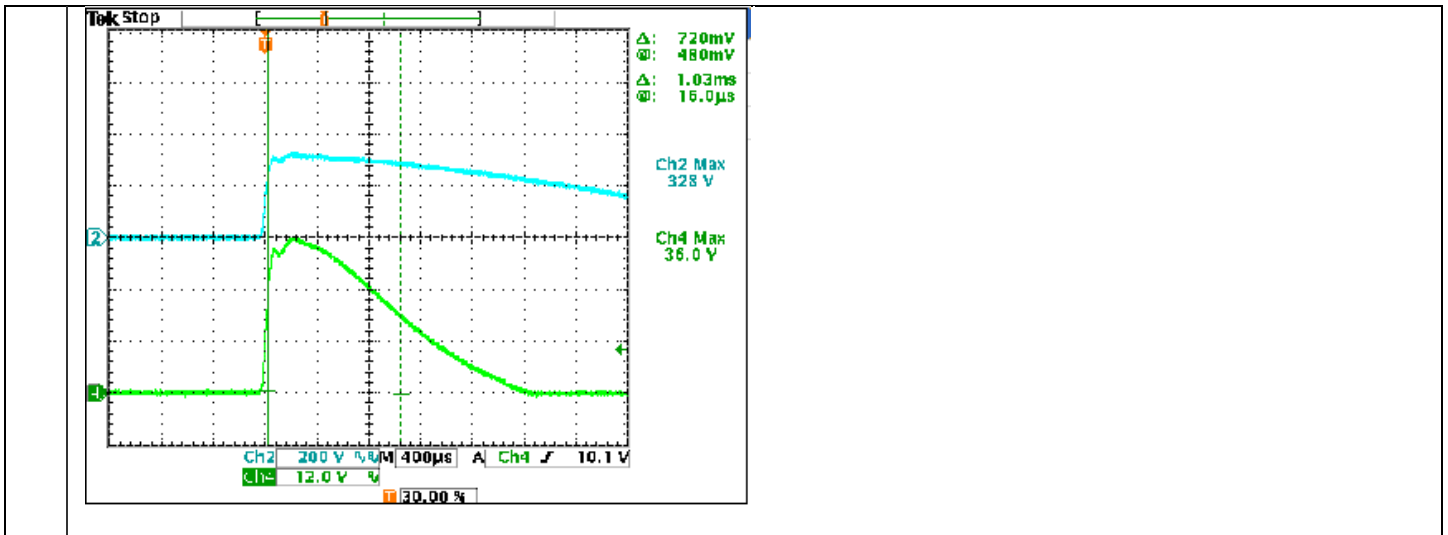
OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 21.6 V~ 28.8 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	20.61V~30.35V/230VAC 20.61V~30.35V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: 1 %~ -1 %	I/P: 100~132VAC/200~264VAC by switch O/P:FULL/ MIN. LOAD Ta:25°C	V1: 0 %~0.04%
3	LINE REGULATION (Max)	V1: 0.5 %~ -0.5 %	I/P: 100~132VAC/200~264VAC by switch O/P:FULL LOAD Ta:25°C	V1:0 %~0.04%
4	LOAD REGULATION(Max)	V1: 0.5 %~ -0.5 %	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0%~0 %
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 200 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 43.0 mVp-p
		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>high frequency :</p> </div> <div style="text-align: center;"> <p>low frequency :</p> </div> </div>		
7	SET UP TIME(Max)	230VAC/500ms 115VAC/500ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/216 ms 115VAC/ 222ms
		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> </div> <div style="text-align: center;"> <p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> </div> </div>		

8	RISE TIME (Max)	230VAC/30ms 115VAC/30ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/6.6 ms 115VAC/ 6.8ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage 		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage 		
9	HOLD UP TIME (Typ.)	230VAC/30ms 115VAC/30ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 41.2ms 115VAC/36.8 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 		
10	DYNAMIC LOAD	V1: 2400 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	330mVp-p 244mVp-p
FULL /50% LOAD 50%DUTY / 120HZ 		FULL /50% LOAD 50%DUTY / 1KHZ 		
11	TRANSIENT RECOVERY TIME	V1: 2400 mVp-p <500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	241mVp-p 240us

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																	
1	INPUT VOLTAGE RANGE	85~132VAC/170~264VAC by switch	I/P:TESTING O/P:FULL LOAD Ta:25°C	80V~132V 137V~264V																																	
			I/P: (1)LOW-LINE-3V=87V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST: OK																																	
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:170 VAC ~264 VAC O/P:FULL-MIN LOAD Ta:25°C	TEST: OK																																	
3	INPUT CURRENT (Typ.)	230V/ 1.6A 115V/ 2.8 A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =1.24A/ 230VAC I =2.35A/ 115VAC																																	
4	LEAKAGE CURRENT	< 0.75mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.411mA N-FG : 0.411mA																																	
5	NO LOAD CONSUMPTION	< 0.5 W	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	< 0.2992W < 0.3998W																																	
6	EFFICIENCY(Typ.)	89 %	I/P:230 VAC O/P:FULL LOAD Ta:25°C	89.23%																																	
<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>Load (%)</th> <th>230V60HZ (%)</th> <th>115V60HZ (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>85.2</td><td>85.2</td></tr> <tr><td>20%</td><td>87.5</td><td>87.2</td></tr> <tr><td>30%</td><td>88.0</td><td>87.5</td></tr> <tr><td>40%</td><td>88.1</td><td>87.5</td></tr> <tr><td>50%</td><td>88.2</td><td>87.5</td></tr> <tr><td>60%</td><td>88.3</td><td>87.5</td></tr> <tr><td>70%</td><td>88.5</td><td>87.5</td></tr> <tr><td>80%</td><td>88.7</td><td>87.4</td></tr> <tr><td>90%</td><td>88.9</td><td>87.3</td></tr> <tr><td>100%</td><td>89.2</td><td>87.3</td></tr> </tbody> </table>					Load (%)	230V60HZ (%)	115V60HZ (%)	10%	85.2	85.2	20%	87.5	87.2	30%	88.0	87.5	40%	88.1	87.5	50%	88.2	87.5	60%	88.3	87.5	70%	88.5	87.5	80%	88.7	87.4	90%	88.9	87.3	100%	89.2	87.3
Load (%)	230V60HZ (%)	115V60HZ (%)																																			
10%	85.2	85.2																																			
20%	87.5	87.2																																			
30%	88.0	87.5																																			
40%	88.1	87.5																																			
50%	88.2	87.5																																			
60%	88.3	87.5																																			
70%	88.5	87.5																																			
80%	88.7	87.4																																			
90%	88.9	87.3																																			
100%	89.2	87.3																																			
7	INRUSH CURRENT(Typ.)	230V/60A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I =36A/ 230VAC T50=1030 us/230V																																	
	INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A)																																				



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110%~ 140 %	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	118.61%/ 264VAC 118.77%/ 230VAC 120.61%/100VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	28.8 V~ 33.6 V	I/P: 264VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta:25°C	31.7V/ 264VAC 31.7V/ 230VAC 31.6V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 264VAC I/P: 85VAC O/P: FULL LOAD	O.T.P. Active PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated :13 A/600V VGS :± 25 V	I/P: High-Line +3V =267V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (4) 0%→400% Load. I/P: Low-Line -3V = 97V O/P: (1) Full Load (2) Output Short (3) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (4) 0%→400% Load. Ta:25°C	VDS: (1) 562V (2) 472V (3) 578V (4) 574V VDS: (1) 448V (2) 394V (3) 444V (4) 480V

4	Diode Peak Voltage	Q101 Rated : 15A/200 V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (4) 0%→400% Load. (5).NO LOAD Ta:25℃	Q101: VDS: (1) 152V (2) 160V (3) 151V (4) 177V (5) 136V
5	Input Capacitor Voltage	C5 Rated: : 330 μ /200 V 105 ℃ Suger Voltage=230V	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25℃	(1) 154V (2) 156V (3) 156V
6	Control IC Voltage Test	PWM IC U1 Rated : 28 V(MAX.) 10.5 V(MIN.)	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR 下限.LOW LINE Ta:25℃	1. 20.8V 2. 12.2V 3. 20.3V 4. 26.1V 5. 16.5V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5 KVAC/min Ta:25℃	I/P-O/P: 3.167mA I/P-FG: 3..51mA O/P-FG: 3.36m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M Ω I/P-FG: 500VDC>100M Ω O/P-FG:500VDC>100M Ω	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25℃	I/P-O/P:9999M Ω I/P-FG: 9999M Ω O/P-FG:9999M Ω NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 m Ω	40A / 2min Ta:25℃	28m Ω

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:80% LOAD Ta:25℃	PASS

The screenshot shows the Chroma Power Meter Harmonic Measurement software interface. It includes a 'Parameters' section with 'Class' set to 'A' and 'Ratio' set to '1'. A 'Class D Parameters' section is also visible. The main display area shows a harmonic spectrum graph with voltage on the y-axis and harmonic order on the x-axis. At the bottom, there is a 'Measurement' section with the following data: V(V) 230.58, I(A) 1.2168, P(W) 139.56, PF 0.4973, FHz 50.000, I Fnd(A) 0.6273, THD(N) 166.40, V Fnd(V) 230.61. The 'Status' section shows 'Measure Start' and 'Current' and 'Voltage' indicators, with 'PASS PASS' displayed.

2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 120% LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -25 °C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0-50°C)	I/P : 230 VAC O/P : FULL LOAD	±0%/°C (0-50°C)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30°C ~ 70°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10-500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 5G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME		(1) 146770HRS (2) 30596HRS (3) 54079HRS (4) 92239HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE : 601KHRS		
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C		

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	

2007/3/20 A50-S014