



Key Feature

- 2 MP HD camera with high quality image
- 120 ° wide angle of view
- 3.5-inch colorful LCD screen with 480 × 320 resolution
- Unlocks by cards and pin-codes
- Supports configuration via Web remotely

Specification

System parameters	
Operating system	Embedded Linux operation system
ROM	4 GB
RAM	512 MB
CPU	Embedded processor
Display parameters	
Screen size	3.5-inch
Operation method	Display screen, touch buttons
Type	Colorful LCD
Resolution	480 × 320
Video parameters	
Lens	2 MP HD camera
Resolution	Main stream: 1920 × 1080p ,720p Sub stream: 640 × 480
FOV	Horizontal: 72 ° , Vertical: 119 ° , Diagonal: 132°
WDR	Support
Supplement light	
	Low illumination, IR supplement lights
Audio parameters	
Video compression standard	H.264
Audio compression standard	G.711 U, G.711 A
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
User capacity	/
Face capacity	/
Card capacity	10000
Linked network camera capacity	500
Network parameters	
Communication protocol	TCP/IP, RTSP
Wired network	Support
Wi-Fi standard	/
Bluetooth version	/
3G/4G standard	/

Authentication

Card type	Mifare card
-----------	-------------

Device interfaces

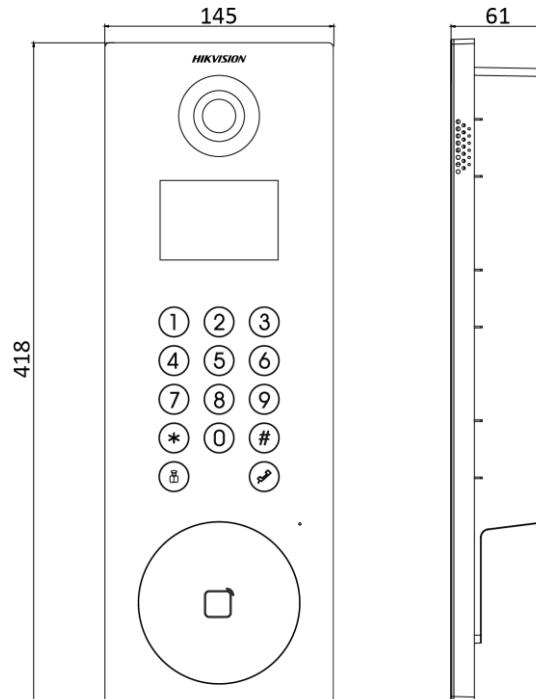
Alarm input	8
Network interface	1 10/100/1000 Mbps self-adaptive, RJ45 analog interface
TAMPER	1
Exit button	2
RS-485	1
USB	0
Wiegand	1
TF card	/
Alarm output	2
Lock control	2
Door contact input	2
Power interface	1

Performances

Multi-factor authentication	10000
-----------------------------	-------

General

Button	14 touch buttons
Installation	Flush mounting
Indicator	/
Weight	Without package: 1.05 kg With package: 2.166 kg
Protective level	IP 65
Working temperature	-40 °C to +55 °C (-40 °F to +135 °F)
Working humidity	10% to 95%
Dimensions	418 mm × 145 mm × 61 mm (16.46" × 5.71" × 2.40")
Battery	/
Power supply	≤ 10 W
Application environment	Outdoor
Language	English, Portuguese (Brazil), Russian, Spanish, French, Turkish, Vietnamese, Ukrainian

Dimension

Unit:mm

Available Model

DS-KD8103-E6



Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramanahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com