

Rexon ERA 3 Gate Bike

The REXON ERA 3 Bike Gate is a premium quality full height turnstile with integrated bicycle gate, ideal for locations where the unmanned access of people and goods is required. With an anti-corrosive finish the Rexon DEA 3 Bike Gate can be used for both indoor and outdoor use.

MAIN FEATURES

- Maximum security dual brake system
- Allows access for bicycles and small motor bikes
- Provides a high level of safety
- Silent and smooth operation

DIMENSIONS

Unit height: 2520mm Unit width: 2230mm Passage height: 2100mm

NUMBER OF WINGS

3 Wings (120°)

PASSAGE WIDTH

Passage width: 580mm Passage width for bike: 540mm Passage width for motorbike: 730mm

FRAME

Hot-dip zinc galvanised

CENTRAL COLUMN/ BARS

Hot-dip zinc galvanised

TOP PANEL

Hot-dip zinc galvanised, powder coated finish in RAL Colour

BARRIER TYPE

11 Tubular bars Ø 40mm (with black plastic covering caps)

POWER SUPPLY

13.8V DC/ 24V AC/ 230V AC

COMMUNICATION INTERFACE

RS485/ USB/ Ethernet



RANGE OF OPERATING TEMPERATURE

-20°C to +50°C (IP 65)

-40°C to +60°C (IP 65) with Extreme outdoor package*

OPERATING MODES

Operating modes can be configured in either direction.

- 1. Free Passage (in/out)
- 2. Access Controlled Passage
- 3. Permanently locked

OPERATING ENVIRONMENT

Indoor/ outdoor

EMERGENCY MODE

On emergency release Fail Safe will put the turnstile into free flow in both directions


Tel: 0870 787 7846 Email: enquiries@meesons.com www.meesons.com

Meesons A.I. Ltd | Cardea House | Sidings Business Park Skipton | North Yorkshire | BD23 1TB

^{*}Optional Feature

OPTIONAL ACCESSORIES

- LED lane light
- Integrated 3rd party terminals
- Passageway light
- Canopy
- Ramp LT
- Inductive loop/ controller
- Mounting frame
- Solid steel ended bars
- Extreme outdoor package
- Economy version with hot-dip galvanized steel rotor and tube

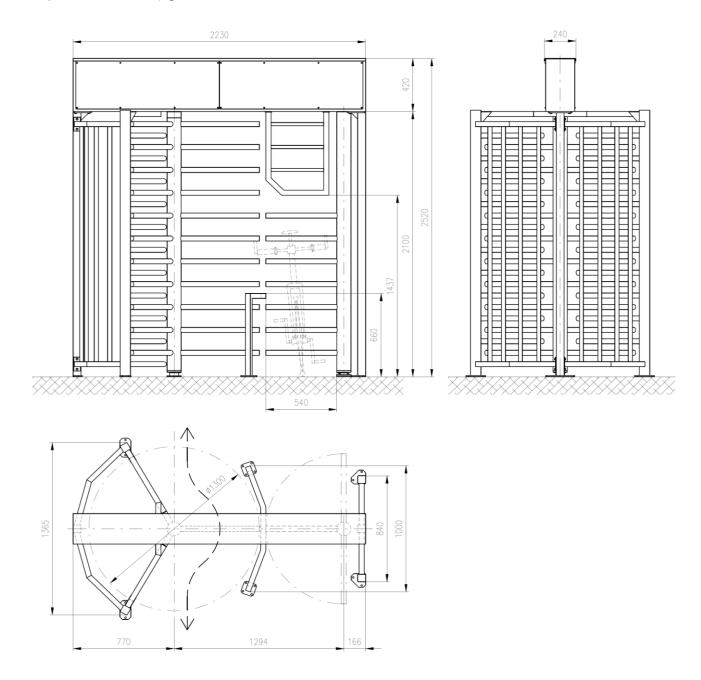

As our policy is to continually improve the products we offer, we reserve the right to amend specifications without prior notice. Further product drawings are available on request