

Mini Camera-Range

Ideal for ATM Machines



High Resolution ATM Camera

SCB-3020/2020

The SCB-3020/2020 high-resolution cameras provide a horizontal resolution of 600TV lines and a low light level of 0.45/0.15Lux. Especially designed for ATMs to assist in the prevention of crime, these cameras keep a close watch on cash deposit/withdraw, while at the same time blanking out the sensitive PIN information. In addition, there are advanced options that include coaxial control, VPS (Virtual Progressive Scan) and intelligent video function.

- High resolution of 600TV lines
- Min. illumination 0.45/0.15Lux@F2.0 (color)
- Built-in 3.7mm fixed lens
- WDR, VPS : SCB-3020
- Intelligent video, coaxial control (CCVC), 12V DC
- 44.5 x 44.5 x 20.1mm compact size

High Resolution ATM Camera

SCB-3020/2020




Specifications

	SCB-3020N/2020N	SCB-3020P/2020P
VIDEO		
Imaging Device	1/3" Double Scan CCD : SCB-3020, 1/3" Super HAD CCD : SCB-2020	
Total Pixels	811(H) x 508(V)	795(H) x 596(V)
Effective Pixels	768(H) x 494(V)	752(H) x 582(V)
Scanning System	2 : 1 Interlace	
Synchronization	Internal / Line lock (L-Pulse input)	
Frequency	H : 15.734KHz / V : 59.94Hz	H : 15.625KHz / V : 50Hz
Horizontal Resolution	Color : 600 TV lines	
Min. Illumination	Color : 0.45Lux (50IRE@F2.0, Sens-up 2x) : SCB-3020 / 0.15Lux (50IRE@F2.0, Sens-up 2x) : SCB-2020	
S / N Ratio	52dB (AGC off, Weight on)	
Video Output	CVBS : 1.0 Vp-p / 75Ω composite	
LENS		
Focal Length (Zoom Ratio)	3.7mm	
Max. Aperture Ratio	F2.0	
Angular Field of View	D : 80.81° / H : 64.65° / V : 48.49°	
Min. Object Distance	0.4m	
OPERATIONAL		
On Screen Display	Multi-language support by coaxial cable English, Japanese, Spanish, French, Portuguese, Taiwanese, Korean	Multi-language support by coaxial cable English, French, German, Spanish, Italian, Chinese, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish, Portuguese
Camera Title	Off / On (Displayed 54 characters)	
Day & Night	Day / Night / Auto	
Backlight Compensation	Off / On	
Wide Dynamic Range	128x : SCB-3020	160x : SCB-3020
Contrast Enhancement	Off / Low / Mid / High	
Digital Noise Reduction	Adaptive 3D+2D (Off / Low / Mid / High / User)	
Digital Image Stabilization	Off / On	
Motion Detection	Off / Tracking / Detection	
Privacy Masking	Off / On (12 programmable zones, polygonal type)	
Sens-up (Frame Integration)	2x ~ 512x	
Gain Control	Off / On	
White Balance	ATW1 / ATW2 / AWC (Manual) / 3200K / 5600K	
Electronic Shutter Speed	1/60 ~ 1/200,000	1/50 ~ 1/200,000
Digital Zoom	Off / On (1x ~ 16x)	
Reverse	Off / H / V / H/V	
Profile	Standard / ITS / Backlight / Day & Night / Gaming / Custom	
VPS	VPS : SCB-3020	
Intelligent Video	Fixed / Moved, Fence (Line, Area)	
PIP	Off / On	
Alarm	1 Output	
Communication	Coaxial control (SPC-300 Compatible)	
Protocol	Coax : CCVC	
ENVIRONMENTAL		
Operating Temperature / Humidity	-10℃ ~ +50℃ (+14°F ~ +122°F) / Less than 90% RH	
ELECTRICAL		
Input Voltage/Current	12V DC	
Power Consumption	Max. 2.0W	
MECHANICAL		
Color / Material	Black / Aluminum	
Dimension (WxHxD)	53.3 x 40.2 x 50.2 (2.1" x 1.58" x 1.98")	
Weight	105g (0.23 lb)	

Dimensions

Unit : mm (inch)

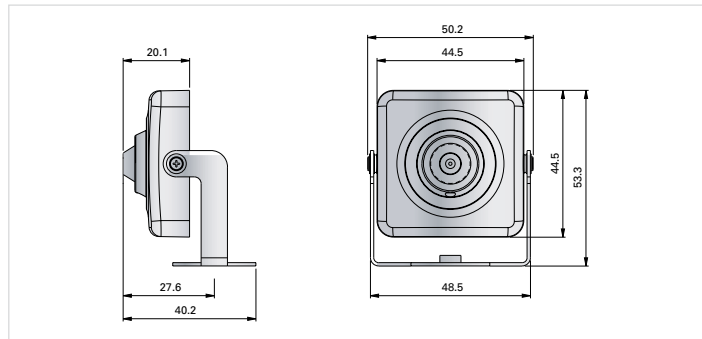

The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD.

701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400
Tel : +82-70-7147-8741 ~ 8749, 8752 ~ 8760 Fax : +82-31-8018-3745
www.samsungsecurity.com www.samsungcctv.com

SAMSUNG TECHWIN AMERICA INC.

1480 Charles Willard St, Carson, CA 90746, UNITED STATES
Tel Free : +1-877-213-1222 Fax : +1-310-632-2195
www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE LTD.

Samsung House, 1000 Hillwood Drive, Hillwood Business Park
Chertsey, Surrey, UNITED KINGDOM KT16 0PS
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.

No.11 Wei 6 Street, Micro-Electronic Industrial Park
Jingang Road, Tianjin, P.R. CHINA 300385
Tel : +86-22-23887788 Fax : +86-22-23887788

■ DISTRIBUTED BY

