

WS-DT43

2-Wire Indoor Monitor



- 4.3" color TFT display
- Slim & Ultra-thin design
- Touch sensor button
- Hands-free communication
- Multi-language OSD
- White housing with plexiglass front panel
- Support memory and call transfer modules



Overview

Simple and intuitive design. Its 4.3" TFT display ensures high quality performance. Thanks to its intuitive graphic menu, the user may control each of the function included in the monitor. Step by step. Its capacitive touch buttons on the panel makes the operation more intuitive and convenient.

Functions

Multi language OSD

The operating languages can be customized, it can satisfy different customer needs.

Touch sensor button

It allows smooth activation and great flexibility with high sensitivity. All functions may be controlled by these buttons.

Slim & Ultra-thin design

17mm thick only. The slim design makes the monitor smarter and it's saving room and getting more enjoyable.

Plexiglass front panel

The flat design with plexiglass front panel against scratch and makes the cleaning easier and quicker.

Divert call

Calling can be transferred to mobile phone via the GSM unit. Three situations can be selected (No divert, if no answer or simultaneously).

Light control

Staircase light available via the RLC unit.

Divert call

Calling can be transferred to mobile phone via the GSM unit. Three situations can be selected (No divert, if no answer or simultaneously).

WS-DT43

Technical Specification

Power Supply	DC 20~28V
Power Consumption	Standby 0.17W Working 4.7W
Resolution	480 x 272 pixels
Video Signal	1Vp-p, 75Ω, CCIR standard
Wiring	2 wires, non-polarity
Dimensions	137 x 137 x 17mm

Display

LCD screen	4.3" digital color TFT
------------	------------------------


Features

No disturb	Mute function Can be set for a time period of 1 hours, 8 hours or always
Ring tones	Total 12 melodies available 9 level ring volume settings Tunes can be set different to distinguish different calling source.
Ringer & doorbell connection	Additional ringer & doorbell can be connected to monitor directly
2 nd lock control	Max. 10A relay for lock
Door lock release	1~9 seconds
Monitoring time	30s ~ 10min
Answering	Hands free operation



Advanced features

Divert call	Calling can be transferred to mobile phone via the GSM unit. Three situations can be selected: No Divert, If no answer or Simultaneously.
Light control	Staircase light available via RLC unit

Dimensions

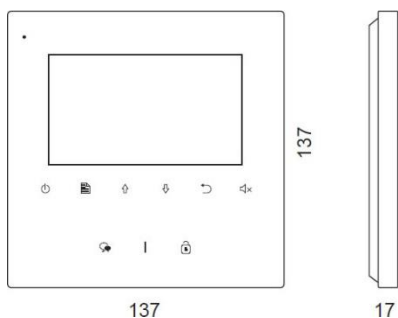

Parts and Functions

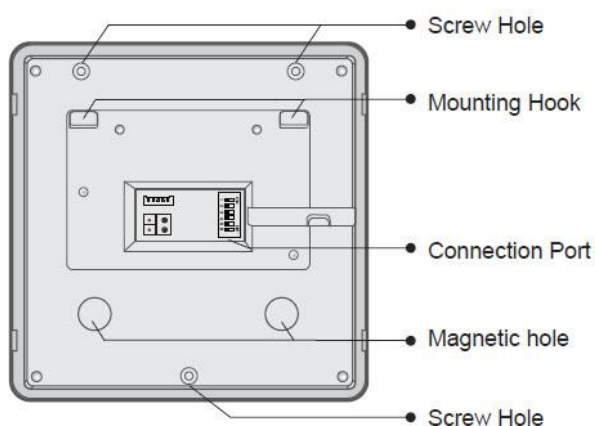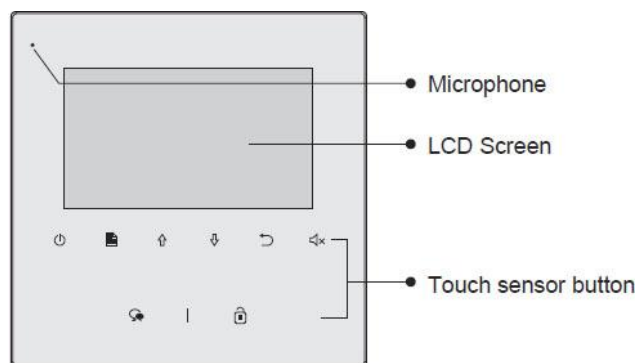

Ordering information

Type	Part Number	Description
2-Wire Indoor Monitor	WS-DT43	4.3" color TFT monitor with touch sensor button & plexiglass panel