

THE COMPACT AND STURDY AUDIO ENTRANCE PANEL












CIAO ONE PANEL 72 OPTIONS


The new **essential and minimal** audio entrance panel from Comelit: surrender to simplicity.

A die-cast aluminium product, ideal for creating new systems and renovating old ones, **Ciao** is available in a **2-wire digital** version (1-72 users).



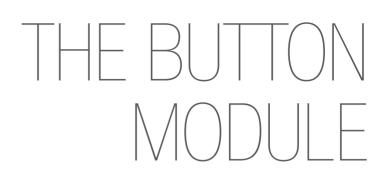

The button module version can accommodate up to 72 users. The module can be fitted in accordance with installation requirements, both horizontally and vertically.

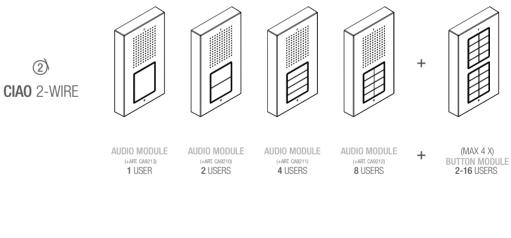





 \otimes







4 USERS ART. CA921

2

8 USERS

2

AMAZINGLY STURDY



- Audio entrance panel in die-cast aluminium.
- Wall-mounted entrance panel.
- Protection rating IK08.
- Entrance panel certified as IP54.
- Dimensions 3.8x6.7" with a thickness of just 1 inch.
- Long-lasting sturdiness and durability.
- Available in a 2-wire version with 1 to 72 buttons (1 audio module + 4 button modules).
- Available in a 5-wire version with 1 to 4 buttons (1 audio module).
- Call buttons with simplified programming.
- Nameplates with white LED backlighting (2-wire digital version).
- Nameplates with blue LED backlighting (5-wire version).
- Buttons with nameplates that can be replaced from the front.









HANDS-FREE VERSION ALSO AVAILABLE

Minimal style and elegant design for the Mini Audio Handsfree, the hands-free version of Mini Audio, with a square shape, buttons featuring **Sensitive Touch** technology and LED backlighting.

DESIGN MILANO

- Hands-free door-entry phone
- Surface-mounted
- Commands with Sensitive Touch technology and LED backlighting
- Version for Simplebus2 system
- Dimensions: 3.75x3.75 in
- Call volume adjustment and privacy function
- Available in white

THE KITS

CIAO KIT PRE-CONFIGURED FOR SINGLE USER **2 WIRES**



2

KCA2071

CIAO AND MINI AUDIO HANDS-FREE SINGLE-USER KIT

Code	Quantity	Description		
CA2100P	1	CIAO ENTRANCE PANEL FOR 1/2/4/8 BUTTONS. S2		
1209	1	2-WIRE VIDEO KIT POWER SUPPLY UNIT		
CA9210	1	2 DOUBLE-HEIGHT BUTTONS FOR CIAO ENTRANCE PANEL		
CA9211	1	4 SINGLE BUTTONS FOR CIAO ENTRANCE PANEL		
CA9213	1	1 LARGE BUTTON FOR CIAO ENTRANCE PANEL		
6751W	1	MINI HANDS-FREE DOOR-ENTRY PHONE, SIMPLEBUS2		



KCA2074

CIAO AND MINI AUDIO HANDS-FREE FOUR-USERS KIT

Code	Quantity	Description		
CA2100P	1	CIAO ENTRANCE PANEL FOR 1/2/4/8 BUTTONS. S2		
1209	1	2-WIRE VIDEO KIT POWER SUPPLY UNIT		
CA9210	1	2 DOUBLE-HEIGHT BUTTONS FOR CIAO ENTRANCE PANEL		
CA9211	1	4 SINGLE BUTTONS FOR CIAO ENTRANCE PANEL		
CA9213	1	1 LARGE BUTTON FOR CIAO ENTRANCE PANEL		
CA9212	1	4 DOUBLE BUTTONS FOR CIAO ENTRANCE PANEL		
6751W	4	MINI HANDS-FREE DOOR-ENTRY PHONE, SIMPLEBUS2		

PART NUMBERS

CIAO

	CA2100P	WALL-MOUNTED CIAO ENTRANCE PANEL FOR 1/2/4/8 BUTT. S2 Ciao series modular entrance panel with die-cast aluminium front cover and white LED nameplate backlighting. To be finished with 1/2/4/8 call buttons, available to purchase separately. Equipped with a surface mounting bracket. The entrance panel can be installed alongside (horizontally or vertically) up to 4 button modules art. CA2200P, for up to 72 call buttons.			
	CA2200P	WALL-MOUNTED CIAO MODULE FOR 2/4/8/16 BUTT. S2 Ciao series button module with die-cast aluminium front cover and white LED nameplate backlighting. To be finished with 2/4/8/16 call buttons, available to purchase separately. Supplied with a surface mounting bracket. Can be installed alongside (horizontally or vertically) up to 4 button modules.			
and the second	CA9213	1 LARGE BUTTON FOR CIAO ENTRANCE PANEL Large button for use with the Ciao series entrance panel.			
John Marke	CA9210	2 DOUBLE-HEIGHT BUTTONS FOR CIAO ENTRANCE PANEL Double-height buttons for use with the Ciao series entrance panel.			
CA9211		4 SINGLE BUTTONS FOR CIAO ENTRANCE PANEL Single buttons for use with the Ciao series entrance panel.			
CA9212		4 DOUBLE BUTTONS FOR CIAO ENTRANCE PANEL Double buttons for use with the Ciao series entrance panel.			
1209		2-WIRE VIDEO KIT POWER SUPPLY UNIT 33 VDC power supply unit with overload and short circuit protection devices. It has two separate continuous outputs: one for external unit and one for the monitor power supply. Input voltage 110-240 VAC. Dimensions: 4.17"x2.44"x3.5" (6 DIN modules).			
3	6751W	HANDS-FREE MINI DOOR-ENTRY PHONE, SIMPLEBUS2 AUDIO Mini series door-entry phone with full-duplex audio. Allows loudspeaker volume control and ringtone volume control, with choice of different melodies. Equipped with 5 touch sensitive buttons for audio key, lock-release, actuator control, switchboard call and privacy function, with door status indicator LED. Manages floor door calls as standard. Complete with 2 x 8-position dip-switches for programming user code and buttons. Wall-mounted. The door-entry phone can be used in Simplebus2 audio systems with power supply art. 1210. Dimensions: 4.13"x4.13"x0.79".			
2708W		2-BUTTON MINI DOOR-ENTRY PHONE, SIMPLEBUS AUDIO MINI series door-entry phone for Simplebus system with electronic call, key button and additional button for extra services (switchboard call, actuator, generic uses). Call volume and privacy adjustment by means of 3-position selector. Privacy activation is indicated by a red light. Allows floor door call management. Complete with 8-position dip-switch for selection of the desired user code. Dimensions: 105x191x28 mm			

USERS	KCA2071	KCA2074	CA2200P	CA9211	CA9212	6751W
	E Correer S STADO Common ares S	TALCO	000 000	- Later surfic man a lateral distance d		
1	1					
2	1					1
3	1					2
4		1				
5		1				1
6		1				2
7		1				3
8		1				4
9		1	1	2		5
10		1	1	2		6
11		1	1	2		7
12		1	1	2		8
13		1	1		2	9
14		1	1		2	10
15		1	1		2	11
16		1	1		2	12
17		1	1		2	13
18		1	1		2	14
19		1	1		2	15
20		1	1		2	16
21		1	1		2	17
22		1	1		2	18
23		1	1		2	19
24		1	1		2	20

and the second s

TAID



www.comelitgroup.com

