


## CAT 6 toolfree Class EA Keystone Jack, shielded

**DN-93614**

**4016032276012**

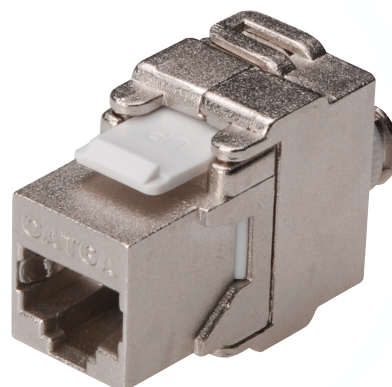

### Quick and safe wire terminations without any special tool

Tested for Link Performance Class EA (A-subscript), for up to 500MHz, GHMT Channel Link certified, DIN EN 50173-1 (IEC 60603-7, IEC 60512-4-1) and ISO/IEC 11801 2002 : AM : 2009/09

- Material enclosure: Zinc diecast
- Material contacts: Phosphor bronze
- Contacts coating: Nickel, gold plated 0,6µ
- Operating temperature: -10 °C ~+50 °C
- Material PCB: FR4, 1,2mm thickness
- Mating cycles: ≥ 750
- RJ 45 jack, female, for patch panel installation
- Compact form allows an installation of 24 x in 483mm (19") 1U blank Panel
- Suitable for bracket typ DN-91400, DN-91401
- Opening size acc. Keystone Standard 19.35 mm x 14.8 mm
- Suitable for design wall plates for several well-known switching programs e.g. Busch-Jaeger part number: 1812 or 1866EB
- Suitable for design wall plates for switching program PEHA part number: D 600 MJ11
- Dimensions (HxWxD): 17mm
- Weight: 30g

